

Pull handles ST

novaglas system



novaglas system
GLASS FIXING MANUFACTURER

NOVAGLAS SYSTEM Krystyna Rozmus / 43-356 Bujakow / ul. Bielecka 31 / Poland

Made
in Poland

Pull handles

www.ngsystem.eu
info@ngsystem.eu
+48 338 108 067
+48 506 103 426

safety
reliability
european quality

Pull handles

ST

We may also the opportunity to choose from a wide range of handles, hinges and self-closing systems for your architectural needs, which ensure a high quality silent and stylish finish. Normally used for the door glass of a thickness 8-12mm, for individual Orders also we make for other glass thickness. Below we present normally used solutions.

Ø14	amount of fixing	A (mm)	B (mm)	glass thickness
ST 14-178/128	2	178	128	6 ÷ 8 mm
ST 14-370/320	2	370	320	
ST 14-530/480	2	530	480	
ST 14-650/550	2	650	550	

Ø20	amount of fixing	A (mm)	B (mm)	glass thickness
ST 20-350/250	2	350	250	6 ÷ 15 mm
ST 20-500/350	2	500	350	
ST 20-700/540	2	700	540	
ST 20-800/600	2	800	600	
ST 20-1000/800	2	1000	800	

Ø25	amount of fixing	A (mm)	B (mm)	glass thickness
ST 25-400/300	2	400	300	6 ÷ 15 mm
ST 25-500/350	2	500	350	
ST 25-700/540	2	700	540	
ST25-800/600	2	800	600	
ST25-1000/800	2	1000	800	
ST 25-1200/1000	2	1200	1000	
ST 25-1500/1300	2	1500	1300	
ST 25-1800/800/800	3	1800	2x 800	

Ø30	amount of fixing	A (mm)	B (mm)	glass thickness
ST 30-600/400	2	600	400	6 ÷ 15 mm
ST 30-800/600	2	800	600	
ST 30-1000/800	2	1000	800	
ST 30-1200/1000	2	1200	1000	
ST 30-1500/1300	2	1500	1300	
ST 30-1800/800/800	3	1800	2x 800	
ST 30-2000/850/850	3	2000	2x 850	6 ÷ 15 mm
ST 35-1000/800	2	1000	800	
ST 35-1200/1000	2	1200	1000	
ST 30-1500/1300	2	1500	1300	

Ø35	amount of fixing	A (mm)	B (mm)	glass thickness
ST 35-1000/800	2	1000	800	6 ÷ 15 mm
ST 35-1200/1000	2	1200	1000	
ST 30-1500/1300	2	1500	1300	
ST 35-2000/850/850	3	2000	2x 850	

Ø35	amount of fixing	A (mm)	B (mm)	glass thickness
ST 40-1200/1000	2	1200	1000	6 ÷ 15 mm
ST 40-1500/1300	2	1500	1300	
ST 40-1800/800/800	3	1800	2x 800	
ST 40-2000/850/850	3	2000	2x 850	

ST 14




ST 20




ST 25



ST 30

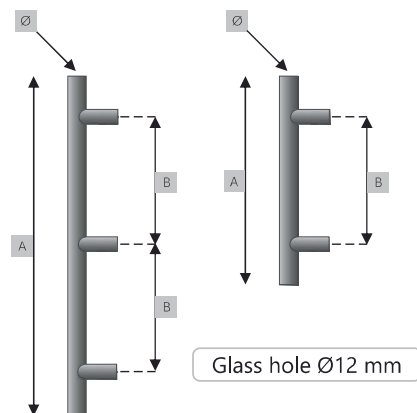

Glass hole Ø12 mm

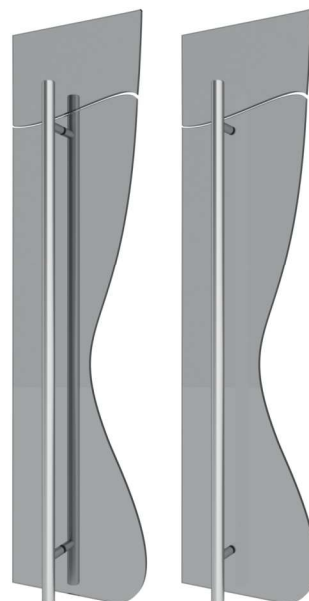

ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30



ST 25

ST 30

